

Submersible Pressure Pump D-SUB

TALLAS
POWERED BY DAB



THESE PUMPS
RESPECT THE ENVIRONMENT


- Compact
- Auto on/off Float Switch
- Overheating Protection
- Stainless Steel Filter
- 🇮🇹 Designed in Italy



	Q _{MAX} (l/h)	H _{MAX} (m)	P ₁ (W)	P ₂ W(HP)
D-SUB 60/3	5880	36	720	500(0.67)
D-SUB 60/4	5700	45	890	600(0.8)



Gardening

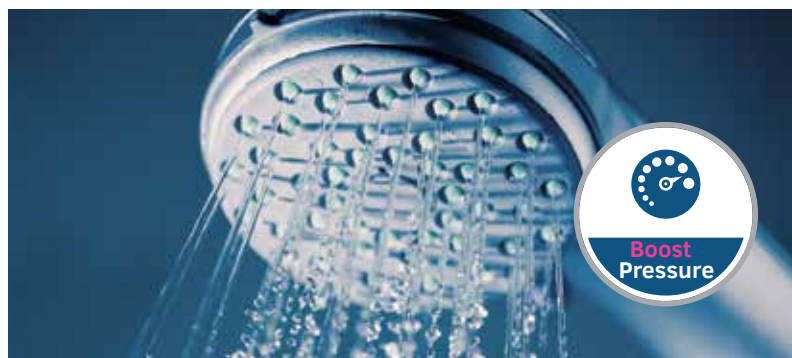

Boost
Pressure

Submersible Pressure Pump D-SUB

- Compact
- Auto on/off Float Switch
- Overheating Protection
- Stainless Steel Filter
- 🇮🇹 Designed in Italy



**Adjustable
Float**





**Stainless Steel
Filter**



Float



	Model	D-SUB 60/3	D-SUB 60/4
Electrical data	P1 Power consumption [W]	720	890
	P2 Pump consumption [W/HP]	500/0.67	600/0.8
	Voltage [V]	230	230
	Frequency [Hz]	60	60
	Current [A]	3.1	3.9
	Capacitor μ F	12.5	12.5
	Capacitor Vc	450	450
Hydraulic data	Flow rate max. [l/h]	5880	5700
	Max. Pressure [Bar]	3.6	4.5
	Max. Head [m]	36	45
	Max. working pressure [bar]	6	6
	Max. Immersion depth [m]	12	12
	Min. submersion depth [cm]	12	12
Range of use/materials	Length of Power Cable [m]	15	15
	Cable	IP 68 / NEMA 6P	IP 68 / NEMA 6P
	Pump International protection	F	F
	Insulation Class	F	F
	Liquid range Temperature [°C]	0 °C / +35 °C	0 °C / +35 °C
	Dimension of particles [mm]	1	1
	Max. Ambient Temperature [°C]	+40 °C	+40 °C
Dimensions / weight	L x W x H [mm]	150 x 150 x 400	150 x 150 x 400
	DNA NPT	1" F	1" F
	DNM NPT	1" F	1" F
	Box Dimensions l x w x h [cm]	20,5 x 24,5 x 47,5	20,5 x 24,5 x 47,5
	Net/Gross Weight [kg]	8.7/10	9/10.2
	Quantity for pallet [no.]	40	40

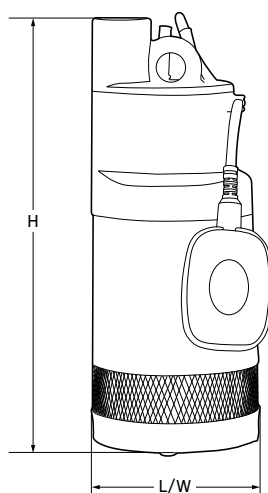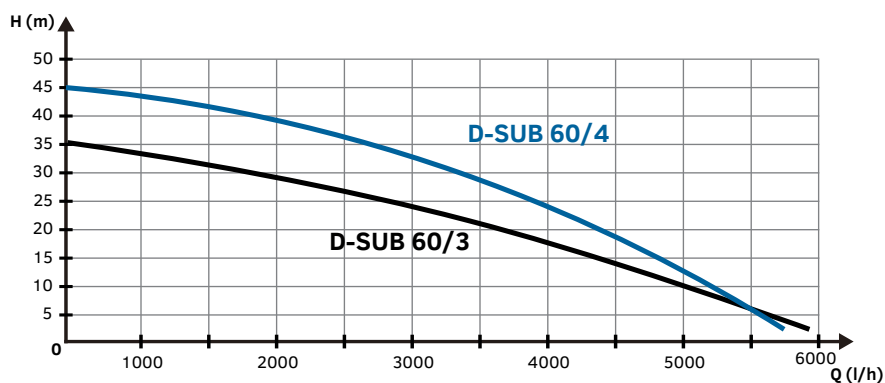



- 